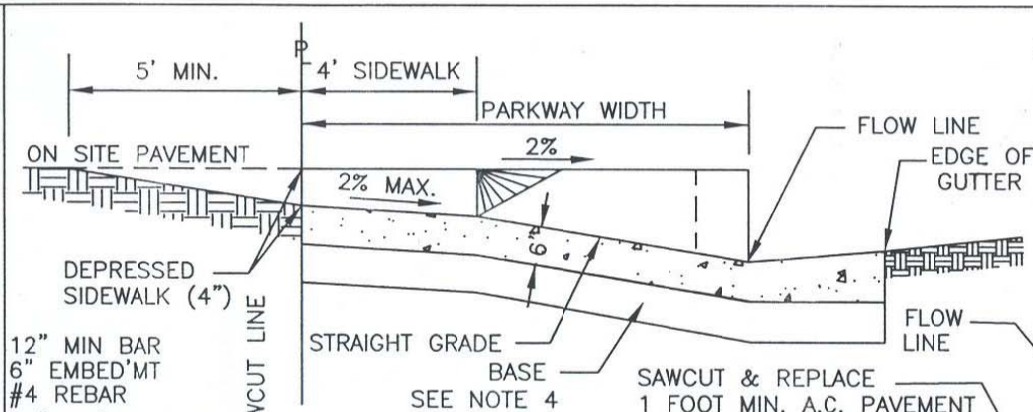

SECTION A-A

ALTERNATIVE :
WITH PRIOR APPROVAL OF THE INSPECTOR, SAWCUT HERE AND CONSTRUCT THE DRIVEWAY. SEE DETAIL HEREON FOR DOWELS AND KEYING UNDER THE EXISTING GUTTER

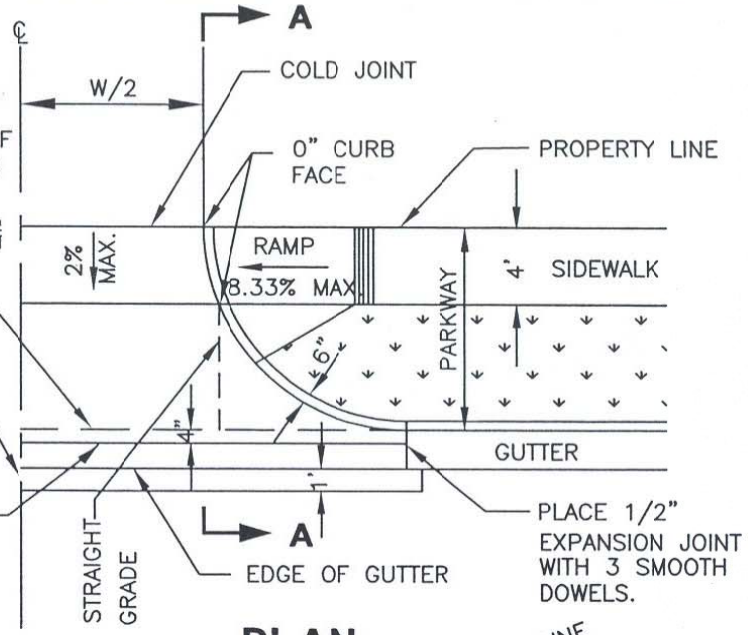

PLAN

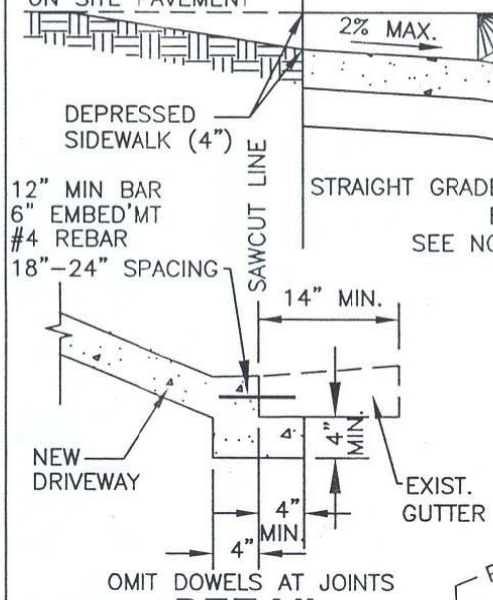

DETAIL

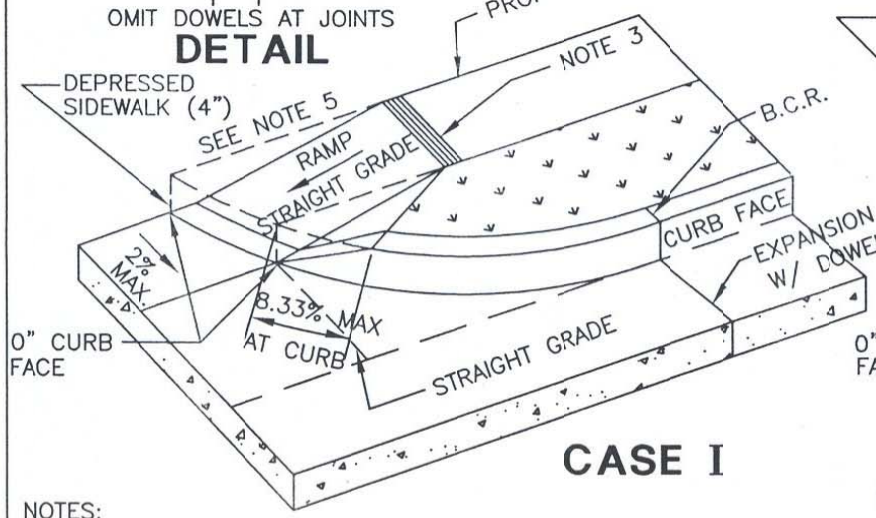

CASE I

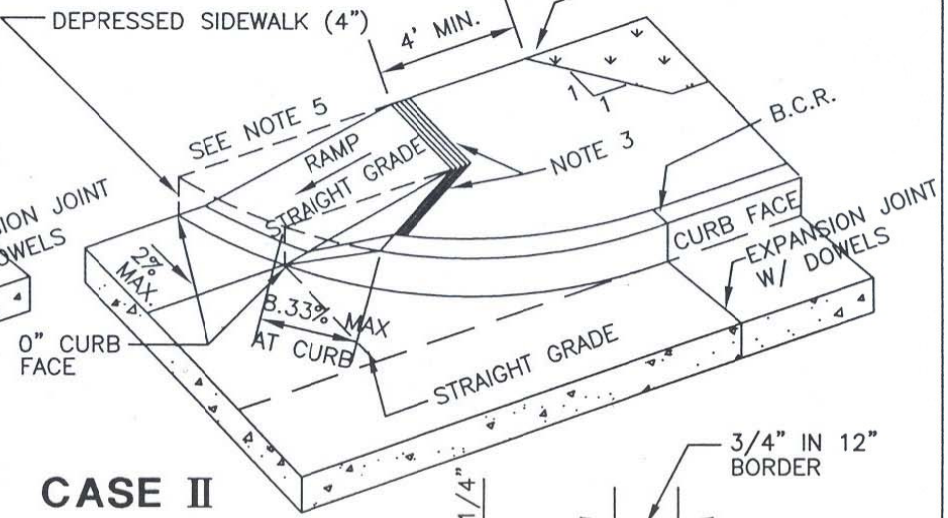

CASE II

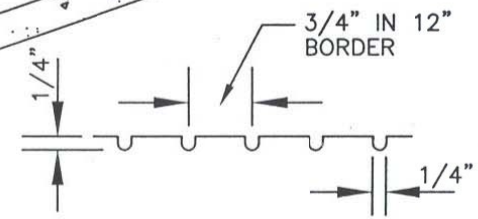

GROOVING DETAIL

NOTES:

1. CURB RADIUS = PARKWAY WIDTH UNLESS OTHERWISE SHOWN ON PLAN OR PERMIT
2. W=24' UNLESS OTHERWISE SHOWN ON PLAN OR PERMIT
3. 12" WIDE BORDER WITH 1/4" GROOVES APPROX. 3/4" O.C. SEE DETAIL HEREON.
4. BASE UNDER THE DRIVEWAY SHALL BE 6" C.A.B. ON SANDY SOIL AND 8" C.A.B. ON CLAYEY SOIL. CMB MAY BE USED INSTEAD OF CAB.
5. IF NEEDED, CONSTRUCT VARIABLE HEIGHT RETAINING CURB AT BACK OF WALK TO JOIN.

CITY OF TORRANCE

RADIUS DRIVEWAY WITH DEPRESSED SIDEWALK

ROBERT J. BESTE
PUBLIC WORKS DIRECTOR
R.C.E. NO. 50737

DATE ISSUED
FEB 15, 2007

STANDARD NO.
T105